

## OILS - CHEMICALS MARTE A.O.



### MARTE A.O.

**Colour:** light blue.


**Temperature range:** from -10°C to + 60°C (14F / 140F).

**Features:** hose in special antimigration PVC compound reinforced with an antishock rigid PVC spiral, it's resistant to abrasion, ageing, atmospheric agents and ozone.


**Applications:** for suction and delivery of mineral oil, lubricants, crude oils (naphta and diesel oil).

## Technical Data

Part number	Inside Ø	Min. wall thickness	Max. wall thickness	Weight	Working press.	Bursting press.	Vacuum	Bending radius	Roll length	Volume
	mm	mm	mm	g/m	bar	bar	mH <sub>2</sub> O	mm	m	m <sup>3</sup>
MT 01 019.0 000.	19,1	4,0	4,2	400	8	24	10	140	50	0,071
MT 01 020.0 000.	20	4,0	4,2	420	8	24	10	140	50	0,074
MT 01 025.0 000.	25	4,3	4,6	550	8	24	10	170	50	0,098
MT 01 030.0 000.	30	4,4	4,6	650	8	24	10	195	50	0,138
MT 01 032.0 000.	31,8	4,4	4,7	700	8	24	10	205	50	0,145
MT 01 038.0 000.	38,1	4,4	4,7	810	7	21	10	235	50	0,193
MT 01 040.0 000.	40	4,3	4,7	830	7	21	10	250	50	0,222
MT 01 045.0 000.	45	4,4	4,8	950	6	18	10	275	50	0,264
MT 01 050.0 000.	50	4,9	5,3	1150	6	18	10	300	50	0,326
MT 01 052.0 000.	50,8	4,9	5,3	1170	6	18	10	300	50	0,330
MT 01 060.0 000.	60	5,4	5,9	1550	6	18	10	355	50	0,485
MT 01 063.0 000.	63,5	5,6	6,0	1690	6	18	10	370	50	0,511
MT 01 076.0 000.	76,2	5,8	6,3	2060	5	15	10	440	50	0,676
MT 01 080.0 000.	80	5,9	6,6	2210	5	15	10	460	30	0,548
MT 01 090.0 000.	90	6,2	6,9	2610	4	12	10	530	30	0,611
MT 01 100.0 000.	100	7,1	7,9	3310	4	12	9	600	30	0,782
MT 01 102.0 000.	102	7,1	7,9	3370	4	12	9	600	30	0,795

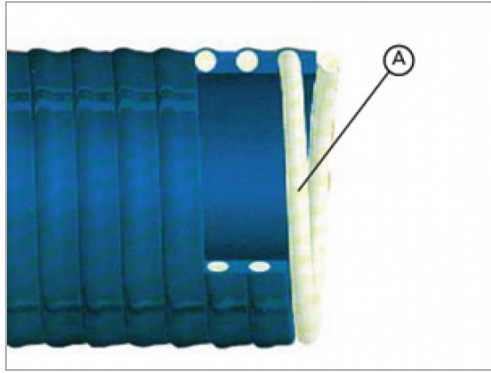

Spiral: Tough anti-crash PVC

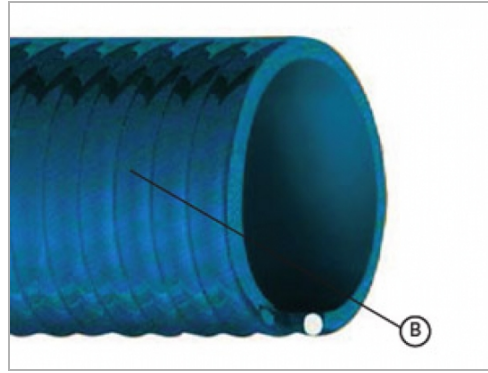

Wall: Oil resistant PVC

Other sizes are available on request