

## **Cold Water Washdown**



**Sizes 19mm – 38mm**

## INDUSTRIAL CLEANING AND WASTE MANAGEMENT

### APOLLO SE



#### APOLLO SE

**Colour:** light blue with an extruded red stripe.

**Temperature range:** - 25°C + 60°C.


**Features:** Pvc hose reinforced with an anti-shock rigid Pvc spiral. **Special formulation particularly suitable to be used at low temperatures.** Inside surface smooth, light corrugation outside. Strong and flexible, resistant to crushing, abrasion, atmospherical agents and most chemicals.

**Applications:** excellent for suction in general, particularly suitable to be used on tank trucks thanks to its physical- mechanical features.


**Can be manufactured antistatic upon request.**

### Technical Data

Part Number	Inside Ø	Max. Wall Thickness	Spess. Max.	Weight	Working Pressure	Bursting Pressure	Vacuum	Bending	Roll Length	Volume
	mm	mm	mm	g/m	bar	bar	m H2O	mm	m	m <sup>3</sup>
AX 01 025	25	3,4	3,8	410	6	18	10	100	50	0,094
AX 01 032	31,8	3,9	4,3	590	6	18	10	130	50	0,143
AX 01 038	38,1	3,9	4,4	690	5	15	10	155	50	0,190
AX 01 040	40	3,9	4,4	720	5	15	10	160	50	0,207
AX 01 050	50	4,3	4,9	980	4	12	10	200	50	0,311
AX 01 052	50,8	4,3	4,9	990	4	12	10	200	50	0,315
AX 01 060	60	4,5	5,2	1230	4	12	9	240	50	0,461
AX 01 063	63,5	4,8	5,5	1390	4	12	9	260	50	0,503
AX 01 070	70	5,0	5,8	1580	3	9	9	280	50	0,603
AX 01 076	76,2	5,0	5,7	1670	3	9	9	310	50	0,648
AX 01 080	80	5,1	6,0	1820	3	9	9	320	50	0,722
AX 01 090	90	5,3	6,3	2120	3	9	9	360	30	0,620
AX 01 100	100	6,0	7,0	2660	3	9	8,5	410	30	0,770
AX 01 102	102	6,0	7,0	2710	3	9	8,5	410	30	0,784
AX 01 105	105	6,0	7,0	2760	3	9	8,5	430	30	0,803
AX 01 110	110	6,1	7,2	2950	3	9	8,5	450	30	0,955
AX 01 120	120	6,3	7,4	3300	2,5	7,5	8	480	30	1,141
AX 01 127	127	6,4	7,5	3550	2,5	7,5	8	510	30	1,231
AX 01 150	151,5	7,3	8,6	4930	2	6	8	610	20	1,323
AX 01 152	152,4	7,6	8,9	5120	2	6	8	610	20	1,335
AX 01 160	160	7,9	9,3	5510	2	6	7	660	20	1,428
AX 01 200	200	10,9	12,1	9890	1,5	4,5	7	850	10	2,171

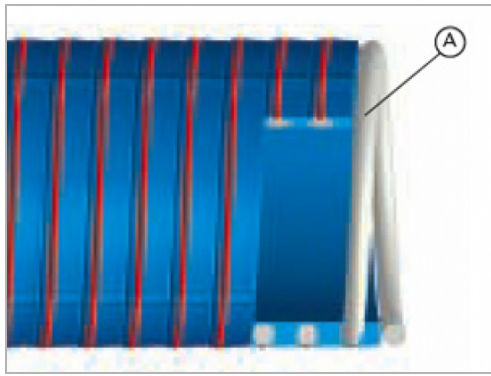


Anti-shock rigid PVC spiral

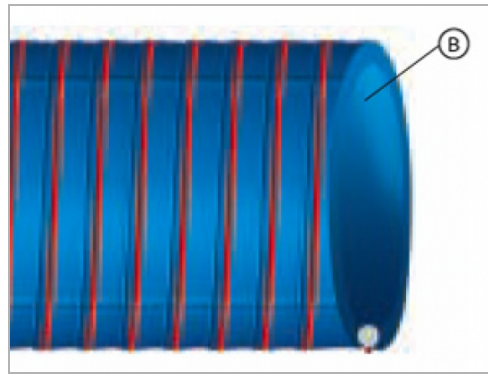

Superealistic PVC compound

## AGRICULTURE

### ARIANNA 20 BAR

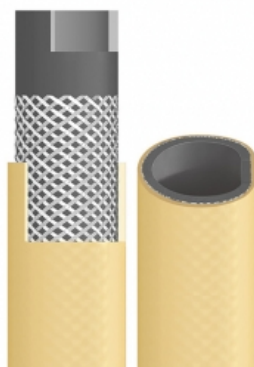

#### ARIANNA 20 BAR

**Colour:** outside beige, inside black.

**Temperature range:** -10°C + 60°C / +14°F + 140°F.

**Features:** flexible hose in special PVC compound stabilized against UV rays. High tenacity polyester yarn reinforcement. Resistant to several chemicals, weather and ozone.

**Applications:** in agriculture for spraying of pesticides and fertilizers.

## Technical Data

Part Number	Inside Ø	Outside Ø	Weight	Working Pressure	Bursting Pressure	Bending	Roll Lenght	Volume
	mm	mm	g/m	bar	bar	mm	m	m <sup>3</sup>
AV 01 008.0 013.0	8	13	110	20	60	80	100	0,032
AV 01 010.0 015.0	10	15	130	20	60	100	100	0,039
AV 01 013.0 019.0	13	19	199	20	60	130	100	0,058
AV 01 016.0 023.0	16	23	283	20	60	160	50	0,047
AV 01 019.0 026.5	19	26,5	361	20	60	190	50	0,059
AV 01 025.0 033.5	25	33,5	526	20	60	250	50	0,093

## INDUSTRIAL CLEANING AND WASTE MANAGEMENT GIOVE



### GIOVE

**Colour:** metal grey.

**Temperature range:** - 10°C + 60°C.


**Features:** Pvc hose reinforced with an anti-shock rigid Pvc spiral. Inside surface smooth, light corrugation outside. **Its extreme strength makes it suitable for heavy-duty applications.** Resistant to crushing, abrasion atmospheric agent and most chemicals.

**Applications:** for suction and discharge of waters, sewage, mud, wood mixing, acid, latex, grains and other materials. It is placed on tank trucks, ships, silos, etc.


**Can be manufactured antistatic upon request.**

### Technical Data

Part Number	Inside Ø	Min. Wall Thickness	Max. Wall Thickness	Weight	Working Pressure	Bursting Pressure	Vacuum	Bending	Roll Length	Volume
	mm	mm	mm	g/m	bar	bar	m H <sub>2</sub> O	mm	m	m <sup>3</sup>
GI 01 050	50	5,2	5,6	1200	7,0	21	10	300	50	0,329
GI 01 052	50,8	5,2	5,6	1220	7,0	21	10	300	50	0,334
GI 01 060	60	5,7	6,2	1600	6,0	18	10	370	50	0,489
GI 01 076	76,2	5,9	6,3	2000	4,5	13,5	10	470	50	0,677
GI 01 100	100	7,3	8,1	3300	4,0	12	9	600	30	0,785
GI 01 102	102	7,3	8,1	3350	4,0	12	9	600	30	0,798
GI 01 127	127	7,5	8,3	4200	3,5	10,5	9	750	30	1,245
GI 01 152	152,8	9,2	10,2	6300	3,0	9	9	900	20	1,359
GI 01 200	200	11,0	12,2	10000	2,0	6	7	1200	10	2,172

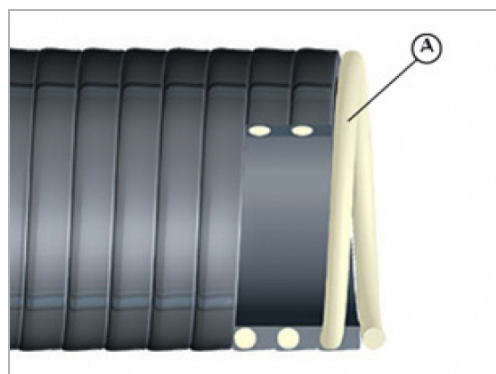

Anti-shock rigid PVC spiral

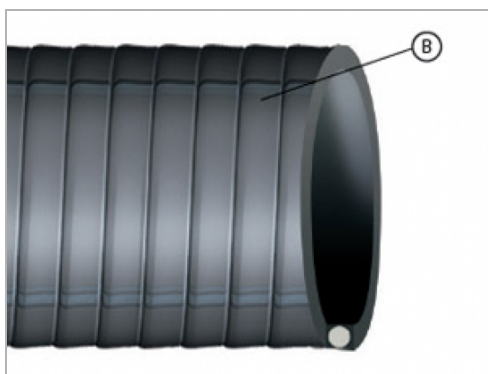


Superelastic PVC compound



## OTHER APPLICATIONS

### SATURNO

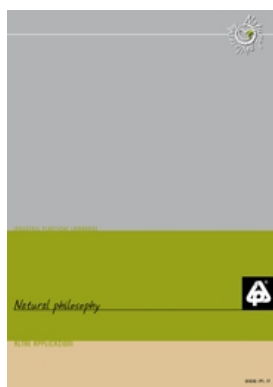

#### SATURNO

**Colour:** green with cream helix.

**Temperature range:** - 10°C + 60°C / + 14°F + 140°F.

**Features:** Pvc hose reinforced with an anti-shock rigid Pvc spiral. Inside surface smooth, light corrugation outside. Strong and flexible, resistant to crushing, abrasion, atmospherical agents and most chemicals.

**Applications:** excellent for suction in general, particularly suitable to be used on slurry machines.

**Can be manufactured antistatic upon request**

## Technical Data

Part Number	Inside Ø	Min. Wall Thickness	Max. Wall Thickness	Weight	Working Pressure	Bursting Pressure	Vacuum	Bending	Roll Length	Volume
	mm	mm	mm	g/m	bar	bar	m H <sub>2</sub> O	mm	m	m <sup>3</sup>
SL 01 019.0 000.	19,1	2,2	2,9	210	5,0	15	6	110	50	0,064
SL 01 020.0 000.	20	2,2	2,9	220	5,0	15	6	110	50	0,066
SL 01 025.0 000.	25	2,3	3,0	280	5,0	15	6	140	50	0,099
SL 01 030.0 000.	30	2,3	3,1	340	5,0	15	6	170	50	0,116
SL 01 032.0 000.	31,8	2,4	3,2	370	5,0	15	6	180	50	0,128
SL 01 035.0 000.	35	2,5	3,3	420	5,0	15	6	195	50	0,154
SL 01 038.0 000.	38,1	2,6	3,4	470	5,0	15	6	210	50	0,182
SL 01 040.0 000.	40	2,6	3,5	510	5,0	15	6	220	50	0,199
SL 01 045.0 000.	45	2,7	3,6	590	5,0	15	6	250	50	0,231
SL 01 050.0 000.	50	3,0	3,8	710	5,0	15	6	270	50	0,289
SL 01 052.0 000.	50,8	3,0	3,8	720	5,0	15	6	270	50	0,293
SL 01 060.0 000.	60	3,0	4,0	870	5,0	15	6	330	50	0,446
SL 01 063.0 000.	63,5	3,0	4,0	920	5,0	15	6	350	50	0,483
SL 01 070.0 000.	70	3,2	4,3	1060	4,0	12	6	450	50	0,531
SL 01 076.0 000.	76,2	3,3	4,4	1180	4,0	12	6	500	50	0,647
SL 01 080.0 000.	80	3,6	4,8	1350	4,0	12	6	550	50	0,702
SL 01 100.0 000.	100	4,6	6,1	2220	3,0	9	6	710	30	0,717
SL 01 102.0 000.	102	4,6	6,1	2260	3,0	9	6	710	30	0,730

Please contact us for other sizes



## Marineflex Bilge Hose

### *Features:*

Black PVC hose with a rigid PVC helix.  
Excellent flexibility.

### *Applications:*

Discharge hose for Bilge pumps.  
Dust extraction ducting.  
Cable conduit.



Nominal ID	Working Press* MPa	Lengths
20mm	0.7	20m
25mm	0.7	20m
28mm	0.7	20m
32mm	0.6	20m
38mm	0.4	20m

\*at 20° Celsius

Available for HCD Flow Technology

[www.hcdflowtech.co.nz](http://www.hcdflowtech.co.nz)

Phone 0800 4 HOSES